




K1650 FIRE RATED STEEL DOOR

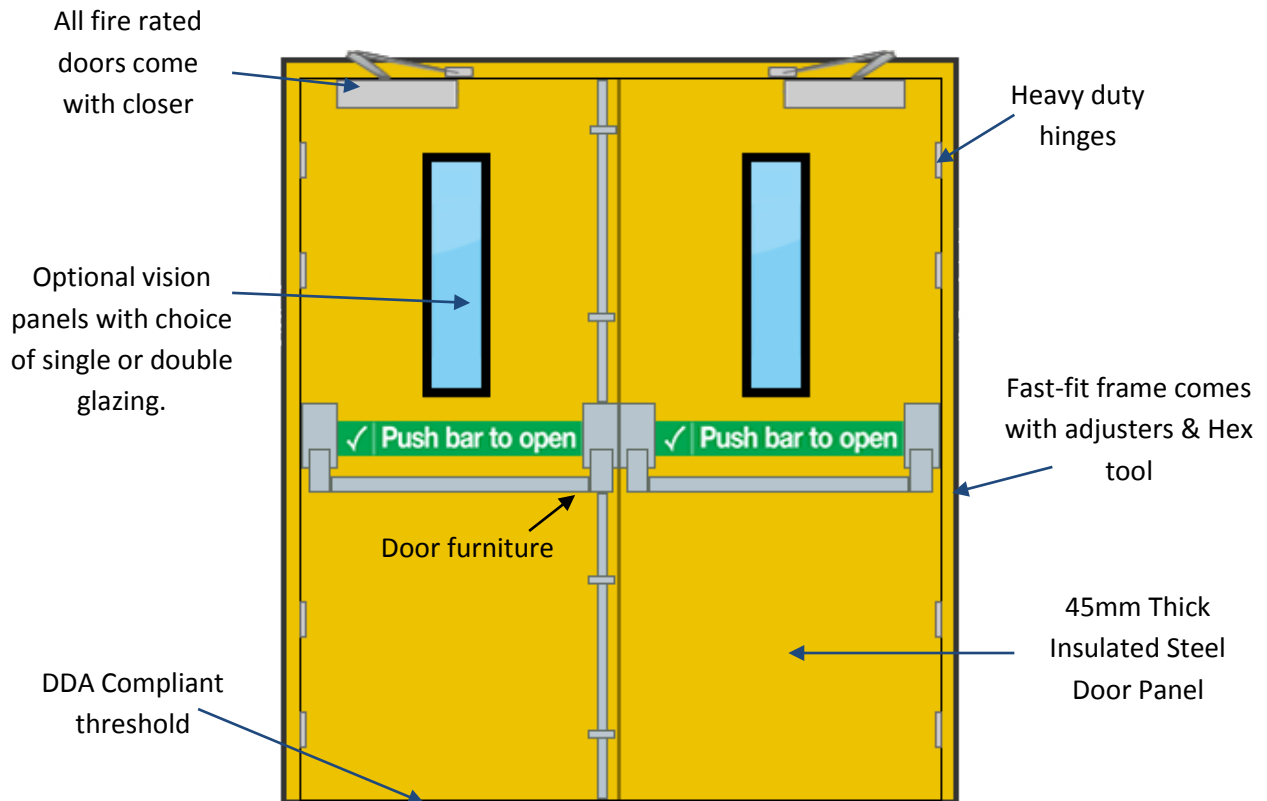

Manufacturer/Supplier: KENFIELD LIMITED 23/25 Prince Road, Kings Norton Business Centre, Kings Norton, Birmingham, West Midlands. B30 3HB. www.kenfield.com

Size: Single – up to 1140mm x 2450mm (w x h). Pair – up to 2230mm x 2450mm (w x h).

Hardware

Hinges: Minimum of 4 high quality stainless steel hinges (BS 1935.2002 grade 13). Larger doors have 6 hinges.

Frame: Manufactured from 1.6mm Zintec Steel with 12 adjusters & Hex Tool for tightening. Prepared for Internal or External installation.

Threshold: Disability Discrimination Act (DDA) compliant aluminium threshold.

Panel Construction

Panel: Manufactured from 1.2mm Zintec Steel. Folded 45mm thick leaf with composite Dufaylite honeycomb core. Integral Anti Jemmy strip to prevent against attack with a crowbar.

Vision panel: Single or double glazed with Firelite/Laminate Glass*, Standard sizes 152mm x 762mm or 203mm x 762mm (w x h.)

Additional Components

Furniture:

Locks & Handles; Sash lock with Euro Profile Cylinder and Lever Handles or Dead lock with Euro Profile Cylinder, Push Plates & Pull Handles. Flush Bolts to passive leaf of double doors. Minimum of 7no. 17.5mm solid steel dog bolts, larger doors have 9no. Optional door closer.

Emergency Escape & Fire Exit; Single Leaf: Single point panic bar or panic pad.

Double Leaf: 3 point panic bar.

Optional External release via Euro Profile Cylinder & lever handle. Door Closer. Flush Bolts.

Finish

Polyester Powder Coating Colour: RAL9010 Pure White, RAL9006 White Aluminium, RAL7024 Graphite Grey, RAL9005 Jet Black, RAL1021 Traffic Yellow, RAL3003 Ruby Red, RAL5002 Ultramarine Blue, RAL5017 Traffic Blue, RAL6002 Leaf Green or RAL8017 Chocolate Brown

*standard supply

KENFIELD LIMITED believe in progressive design and as a result materials specification can be subject to change.