


# TECHNICAL SPECIFICATION



## K250 GRP RETAIL DOOR

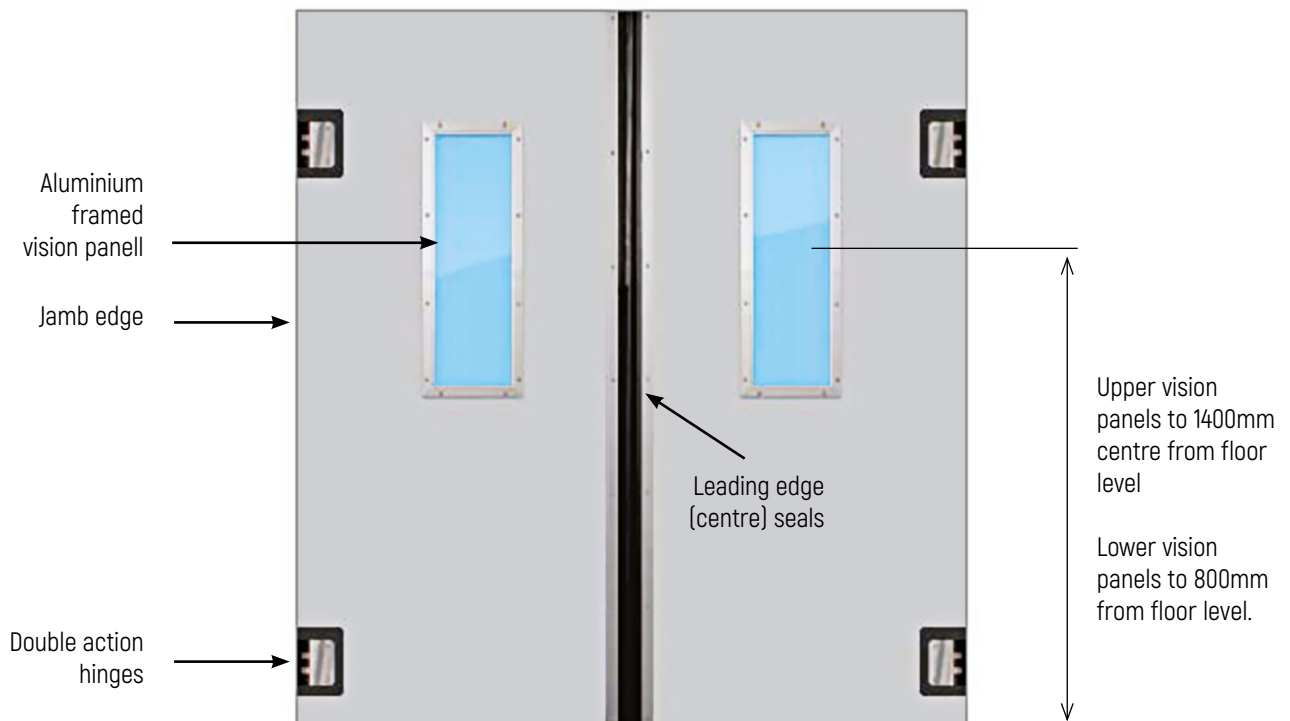

**Size:** Single – up to 1200mm x 2400mm (w x h). Pair – up to 2400mm x 2400mm (w x h).

**Colour:** Standard White\* & Grey (RAL7001). Any RAL colour available by request.

### Hardware

**Composite Plastic Hinge\*:** Tension adjustable double action composite plastic hinge up to 180° swing, Integral mounting holes.

**Stainless Steel Helical Hinge:** Tension adjustable stainless steel double action hinge with selflubricating enclosed high tensile springs up to 360° swing c/w polyethylene mounting.

**Stainless Steel & Self-Lubricating Plastic Hinge:** with up to 180° swing c/w Stainless Steel mounting plate.

### Panel Construction

**Panel:** 6-8mm thick Glass Reinforced Plastic.

**Vision Panel:** 6-8mm thick Acrylic glass with anodised Aluminium frame. Standard sizes 200x700mm\* or 200x900mm (w x h). Optional lower vision panels 200x300mm or 300x300mm (w x h) for DDA conformity.

### Additional Components

**Seals:** Centre\* or Jamb seals can be supplied using PVC coated Polyester fabric with Aluminium mounting. Jamb seals are placed between hinges only.

**Impact Protection:** Polypropylene teardrop bumpers 250mm high or polyethylene profile bumper 100mm high.

**Fixing Method:** Fix directly to structure (if sound) with suitable screws or a sub-frame can be supplied by KENFIELD LIMITED.

\*standard supply